


Jowat AG
 Postfach 1953
 D-32709 Detmold
 Phone: +49(0)5231 749-0 Fax: +49(0)5231 749-105
 Internet: www.jowat.de EMail: info@jowat.de

Jowacoll®
 Dowelling adhesives

Accurate pattern control

The Jowat product range for dowel driving glues has been totally revised and adapted to the latest application technologies. Find out for

yourself how accurate the adhesive application with these products can be. The table below gives a comparative list.

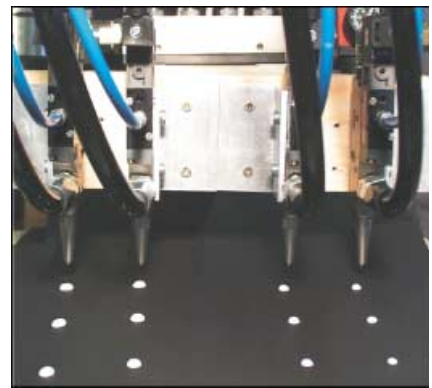

i Processing instructions for vertical application

Jowacoll® Dowelling glues	Viscosity in mPas	Processing instructions	Ø nozzle in mm	nozzle open for in msec
114.30	approx. 2,250	4:1 Piston pump 1:1 Membrane pump	0.4 - 0.6	20 - 30
114.60	approx. 350	1:1 Membrane pump, pressurized container	0.4 - 0.6	20 - 30
114.70	approx. 190	1:1 Membrane pump, pressurized container	0.4 - 0.6	20 - 30
114.80	approx. 9,500	up to 10.1 15.1 Piston pump	0.4 - 0.6	20 - 30
114.90	approx. 80,00	or 9.1 Piston pump with 18.1 proportioning feeder	0.6 - 0.8	20 - 30
114.99	approx. 24,000	or 9.1 Piston pump with 18.1 proportioning feeder	0.6 - 0.8	20 - 30

i Processing instructions for horizontal application

Jowacoll® Dowelling glues	Viscosity in mPas	Processing instructions	Ø nozzle in mm	nozzle open for in msec
114.30	approx. 2,250	4:1 Piston pump	0.4 - 0.6	20 - 30
114.60	approx. 350	1:1 Membrane pump, pressurized container	0.4 - 0.6	20 - 30
114.70	approx. 190	1:1 Membrane pump, pressurized container	0.4 - 0.6	20 - 30
114.80	approx. 9,500	up to 10.1 15.1 Piston pump	0.4 - 0.6	20 - 30

More than adhesive – First-class bonding